
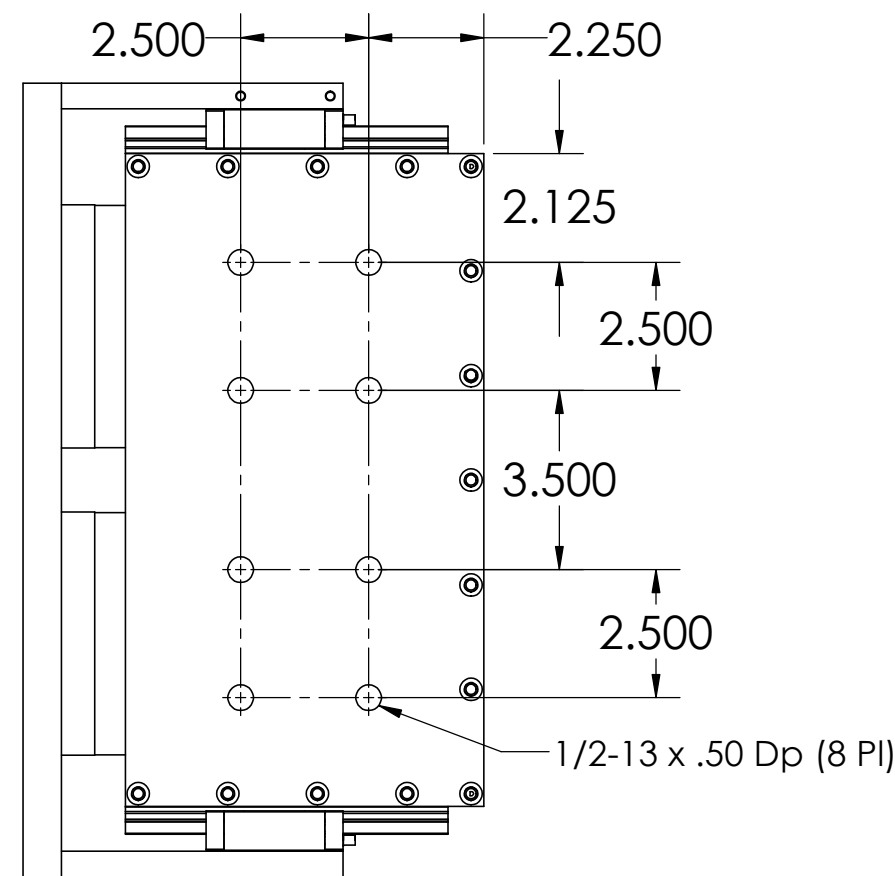
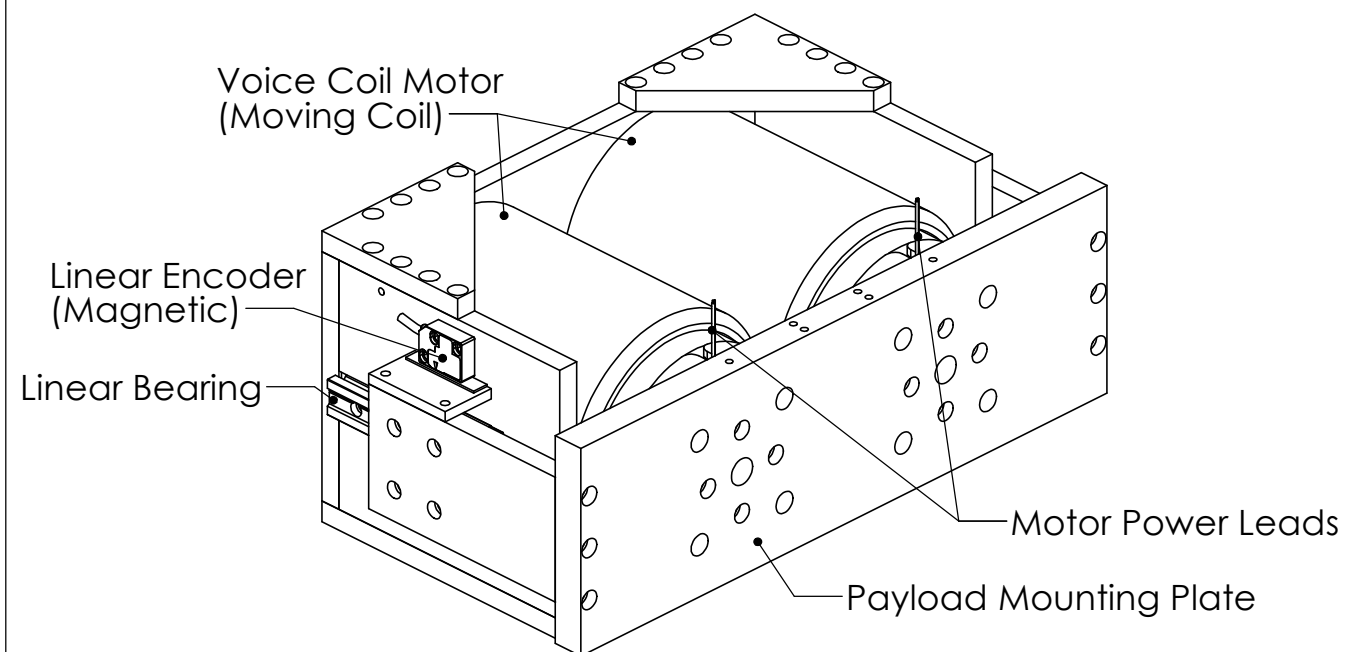
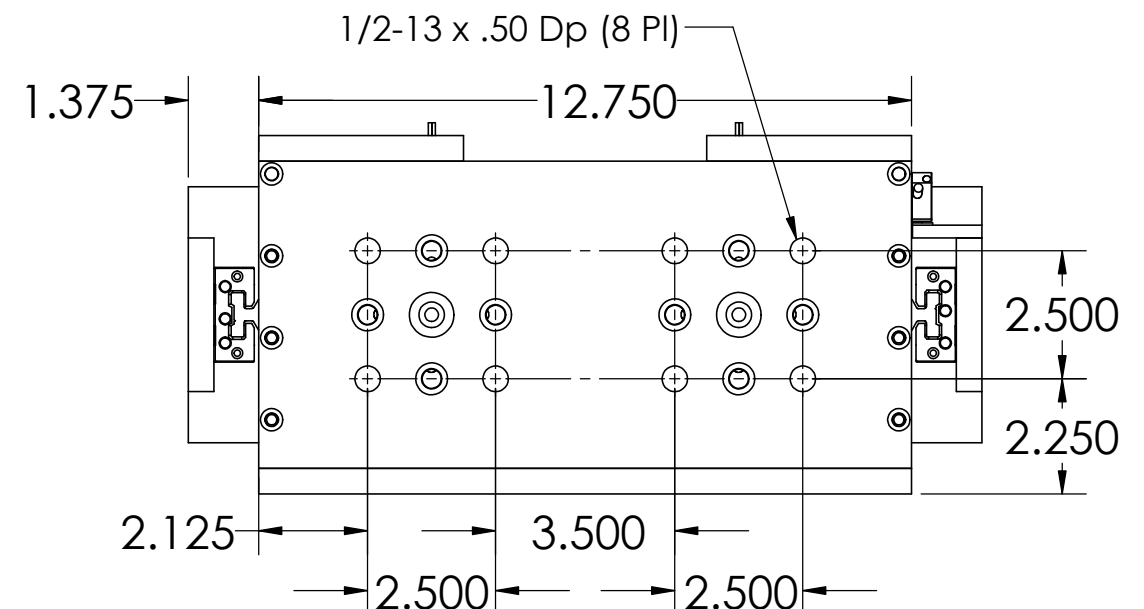
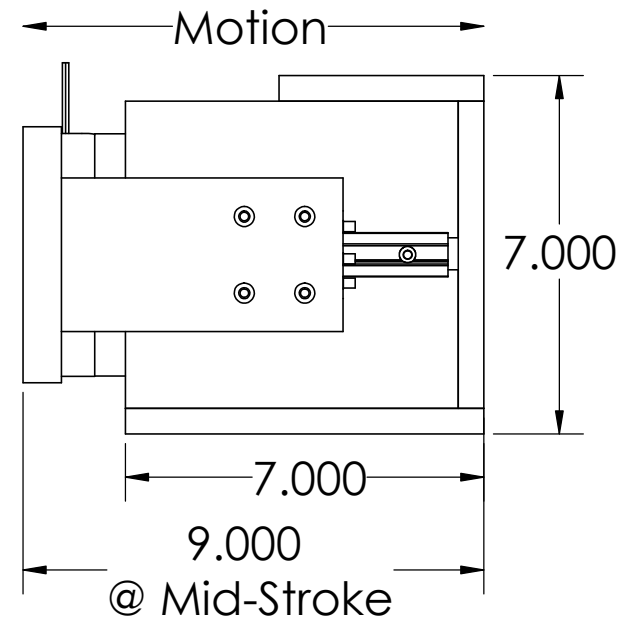


These drawings and specifications are the property of H2W Technologies, Inc. They are issued in confidence and shall not be reproduced, copied, or used without written permission from H2W Technologies, Inc.

REVISION TABLE						
REV	ECN#	DESCRIPTION	REV BY	APPROVED	DATE	
---	---	Original Drawing	OOG	MPW	11-10-16	

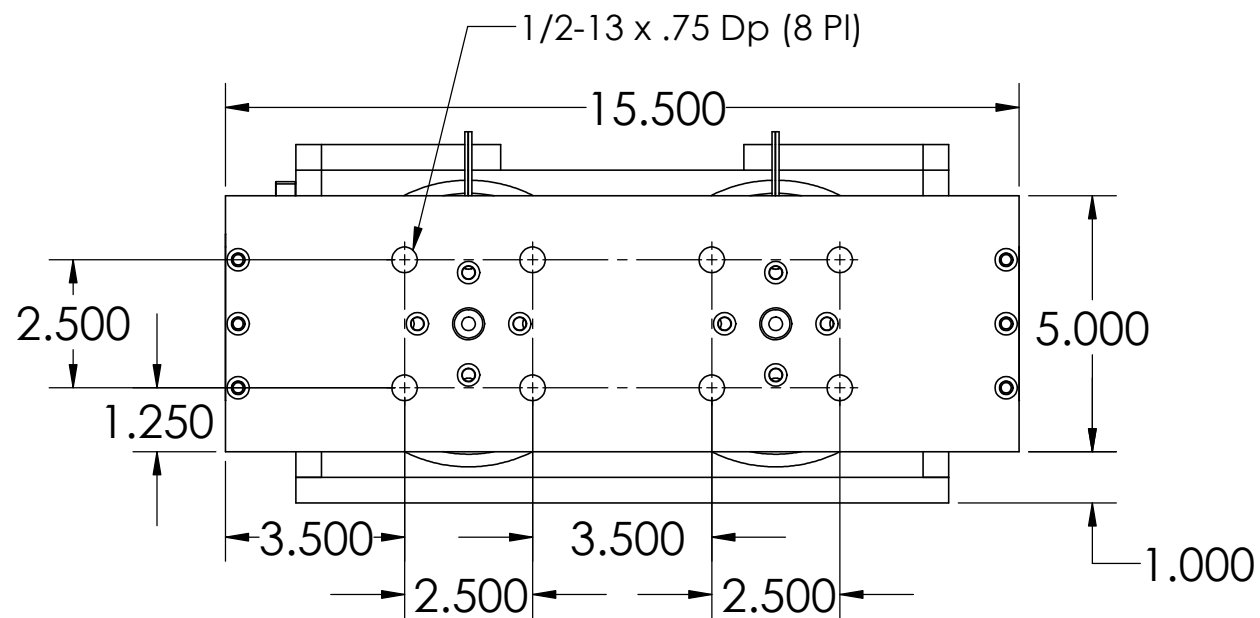

UNLESS SPECIFIED OTHERWISE:
 All dimensions are in inches
 Standard Tolerances are as follows
 .XXX ±.005 ANGLES ±1°
 .XX ±.010 FILLETS AND
 .X ±.020 CORNERS .010
 Remove All Burrs and Sharp Edges

MATERIAL		DATE		APPROVED	
FINISH		DATE	11-10-16	APPROVED	MPW
DRAWN	OOG	DATE	9-10-15	APPROVED	MPW

H2W Technologies, Inc.
 26380 Ferry Court Santa Clarita, CA 91350 USA
 Tel: (661) 291-1620 Fax: (661) 291-1626
 www.h2wtech.com

TITLE			
Voice Coil Positioning Stage Model #: VCS12-2000-LBP-01-MC			
DWG #	REV	SHEET	
31-0772	---	1 of 2	

These drawings and specifications are the property of H2W Technologies, Inc. They are issued in confidence and shall not be reproduced, copied, or used without written permission from H2W Technologies, Inc.

VOICE COIL POSITIONING STAGE SPECIFICATIONS		
Motor P/N	NCC12-60-1000-2X (parallel)	
Stroke	1.20"	30.5 mm
Encoder Resolution	1 micron	
Encoder Type	Magnetic	
Bearing Type	Linear Bearing	
Moving Part	Coil Assembly	
Moving Mass	1.90 lbs	0.86 kg
Total Mass	109 lbs	24.7 kgrams
Resistance @ 20C	1.5 ohms	
Inductance @ 20C	1.4 mH	
Electrical Time Constant	0.93 msec	
Motor Constant	16.4 LBS/SQRT(Watt)	73.0 N/SQRT(Watt)
Force Constant	40.2 LBS/Amp	178.9 N/Amp
Back EMF	2.3 V/ips	88.5 V/m/sec
Force @ 100% Duty	200 lbs	908 N
Power @ 100% Duty	149 watts	
Current @ 100% Duty	10.0 Amps	
Force @ 10% Duty	600 lbs	2670 N
Power @ 10% Duty	1340 watts	
Current @ 10% Duty	30.0 Amps	

VOICE COIL POSITIONING STAGE SPECIFICATIONS		
Motor P/N	NCC12-60-1000-2X (series)	
Stroke	1.20"	30.5 mm
Encoder Resolution	1 micron	
Encoder Type	Magnetic	
Bearing Type	Linear Bearing	
Moving Part	Coil Assembly	
Moving Mass	1.90 lbs	0.86 kg
Total Mass	109 lbs	24.7 kgrams
Resistance @ 20C	6.0 ohms	
Inductance @ 20C	5.4 mH	
Electrical Time Constant	0.93 msec	
Motor Constant	16.4 LBS/SQRT(Watt)	73.0 N/SQRT(Watt)
Force Constant	19.5 LBS/Amp	88.5 N/Amp
Back EMF	4.6 V/ips	178.9 V/m/sec
Force @ 100% Duty	200 lbs	908 N
Power @ 100% Duty	149 watts	
Current @ 100% Duty	5.0 Amps	
Force @ 10% Duty	600 lbs	2670 N
Power @ 10% Duty	1340 watts	
Current @ 10% Duty	14.9 Amps	

