


ACTUATOR SHOWN FULLY RETRACTED

REVISION TABLE					
REV	ECN#	DESCRIPTION	REV BY	APPROVED	DATE
---	---	Original Drawing	JRM	MPW	6-27-17

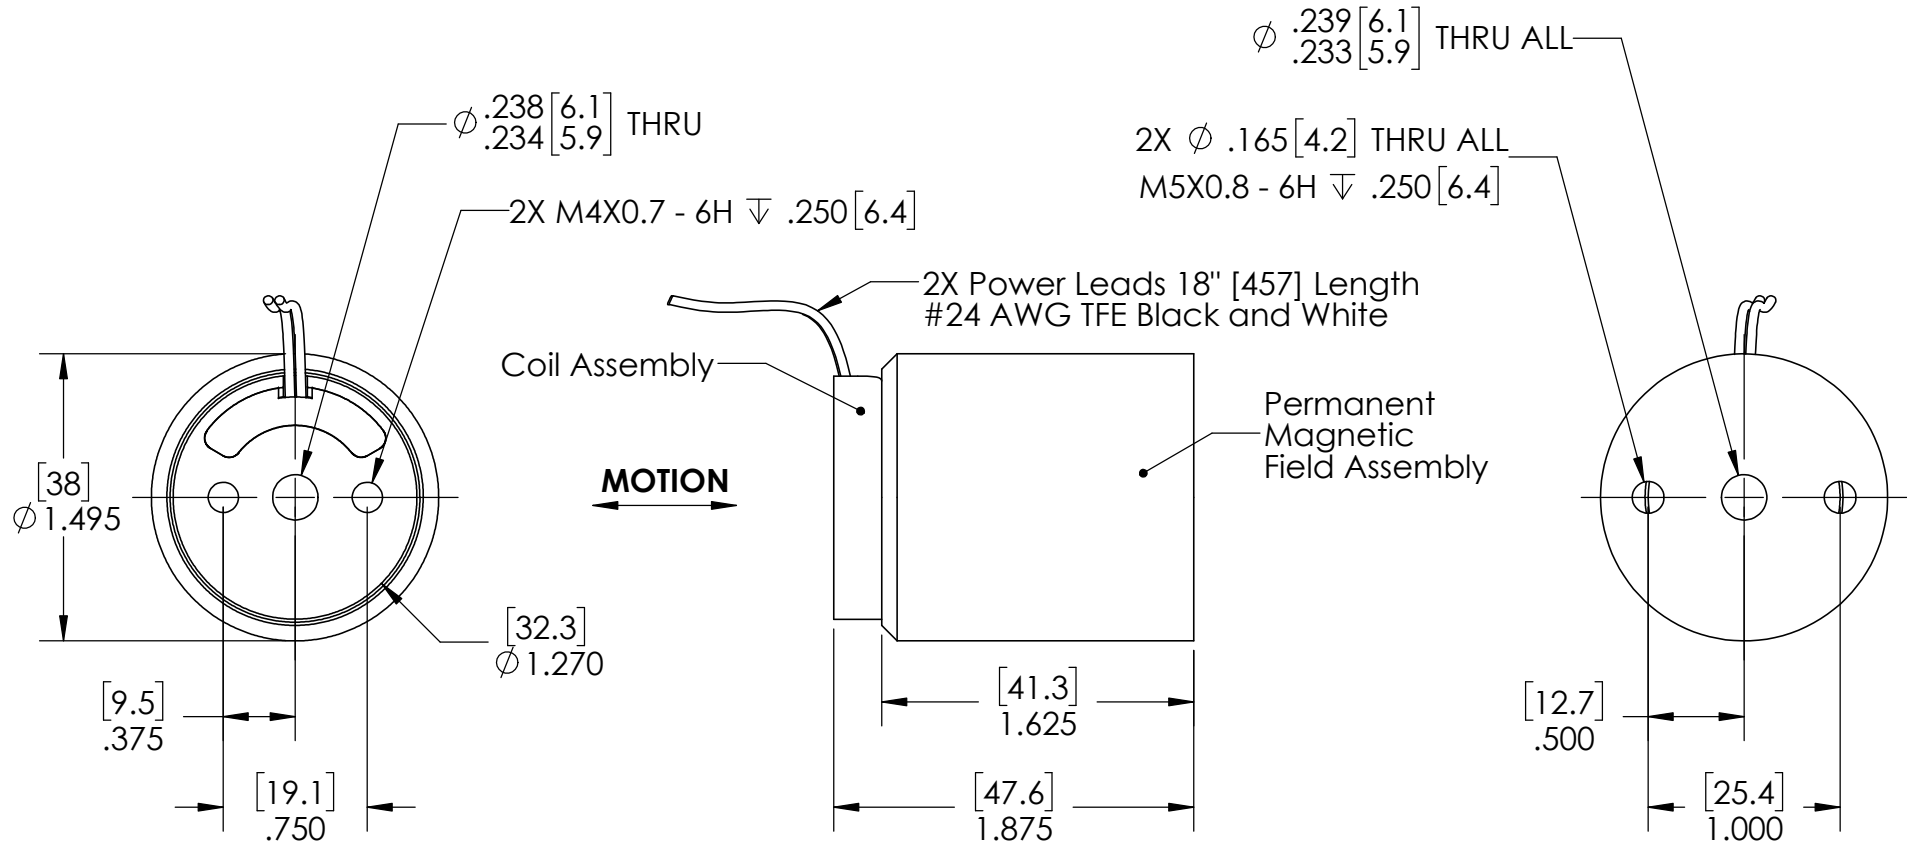

NOTE:
 1. When (+) is connected to White Lead and (-) is connected to Black Lead, the coil assembly will move out of the permanent magnetic field assembly

1

2


3

4

5

NON-COMM ACTUATOR SPECIFICATIONS

Motor P/N	NCC03-15-050-2H	
Device Type	Moving Coil	
Stroke	0.25 in	6.4 mm
Radial Clearance	0.015 in / side	0.38 mm / side
Bearing Type	None	
Moving Mass	0.13 lbs	55 grams
Total Mass	0.70 lbs	310 grams
Resistance @ 20C	3.75 ohms \pm 0.4 ohms	
Inductance @ 20C	1.30 mH \pm 0.30 mH	
Electrical Time Constant	0.35 msec	
Motor Constant	1.38 lbs/sqrt(watt)	6.14 N/sqrt(watt)
Force Constant	2.7 lbs/amp	11.9 N/amp
Back EMF	0.3 V/ips	11.9 V/m/sec
Force @ 100% Duty	5.0 lbs	22.3 N
Power @ 100% Duty	13 watts	
Current @ 100% Duty	1.9 amps	
Force @ 10% Duty	15.0 lbs	66.8 N
Power @ 10% Duty	118 watts	
Current @ 10% Duty	5.6 amps	

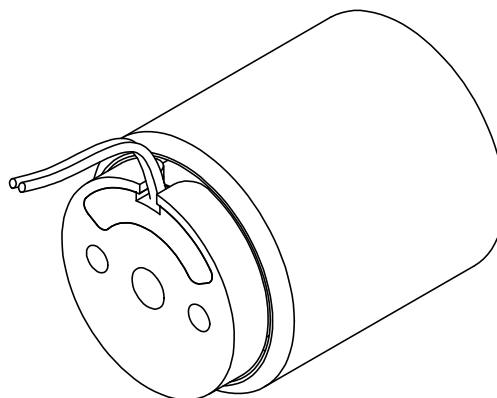

H2W Technologies, Inc.

Santa Clarita, CA 91350 USA
Tel: (661) 291-1620

www.h2wtech.com

These drawings and specifications are the property of H2W Technologies, Inc. They are issued in confidence and shall not be reproduced, copied, or used without written permission from H2W Technologies, Inc.

UNLESS SPECIFIED OTHERWISE:
All dimensions are in inches
Standard Tolerances are as follows
.XXX \pm .005 ANGLES \pm .1°
.XX \pm .010 FILLETS .010
.X \pm .020 CORNERS .010
Remove All Burrs and Sharp Edges

**FOR
REFERENCE
ONLY**

MATERIAL

FINISH

TITLE

Voice Coil Actuator Model #:

NCC03-15-050-2H

DWG # **30-1326**

REV ----

DATE 6-27-17

SHEET

2 of 2