
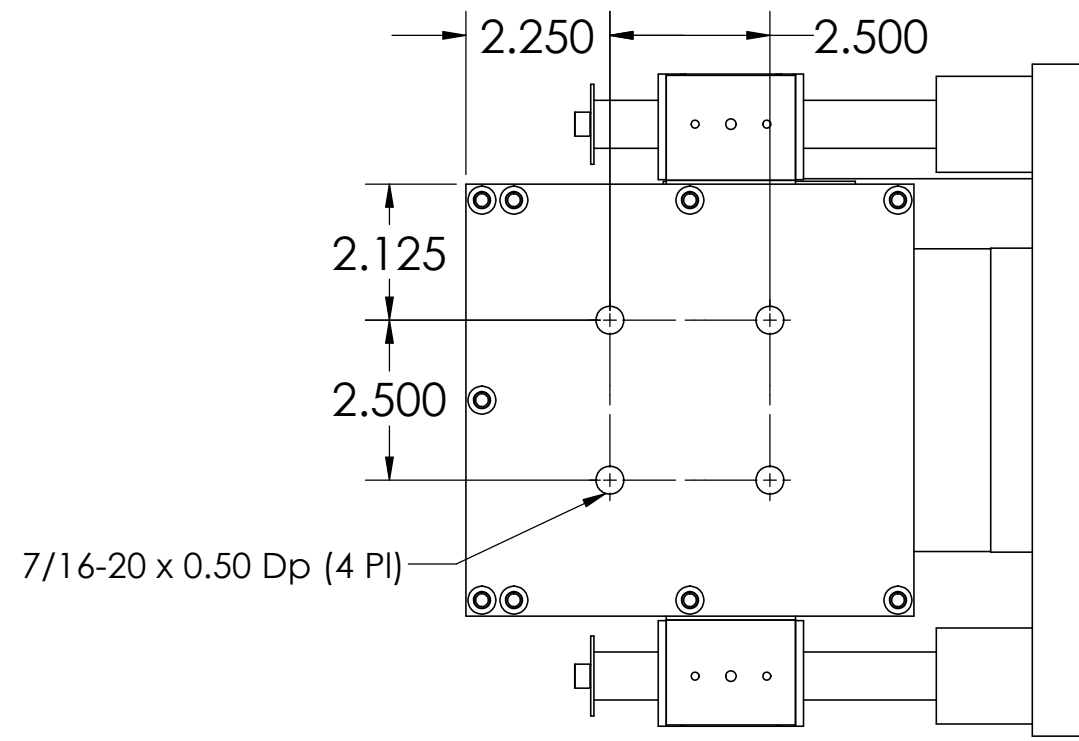
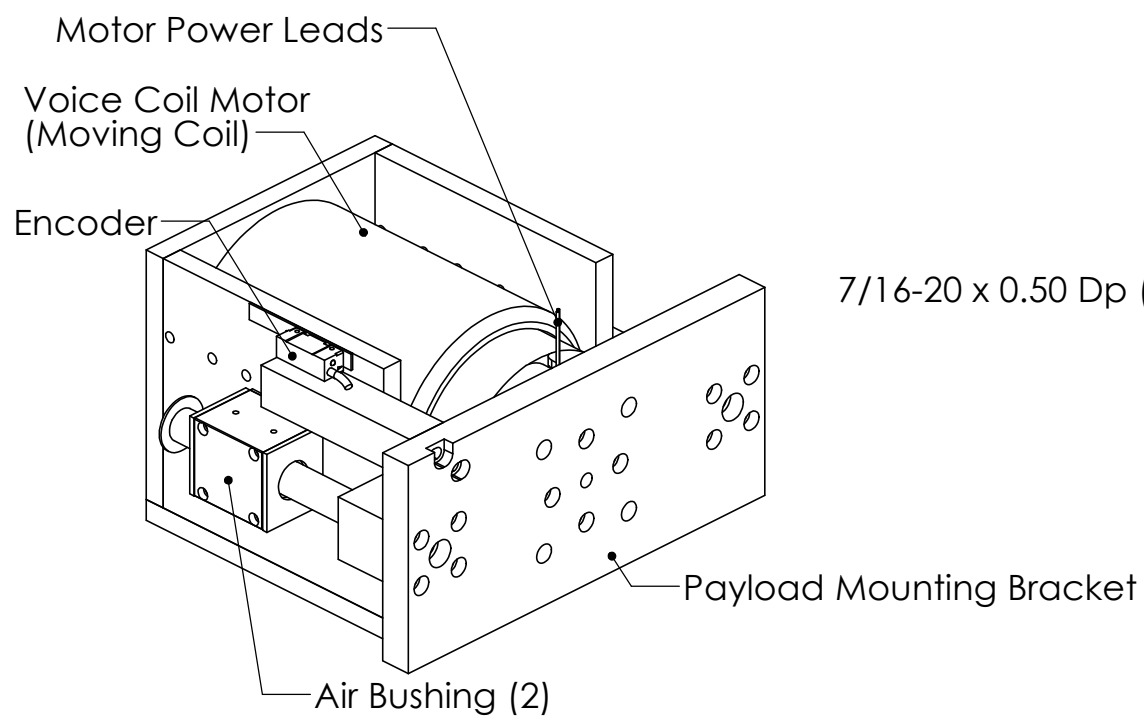
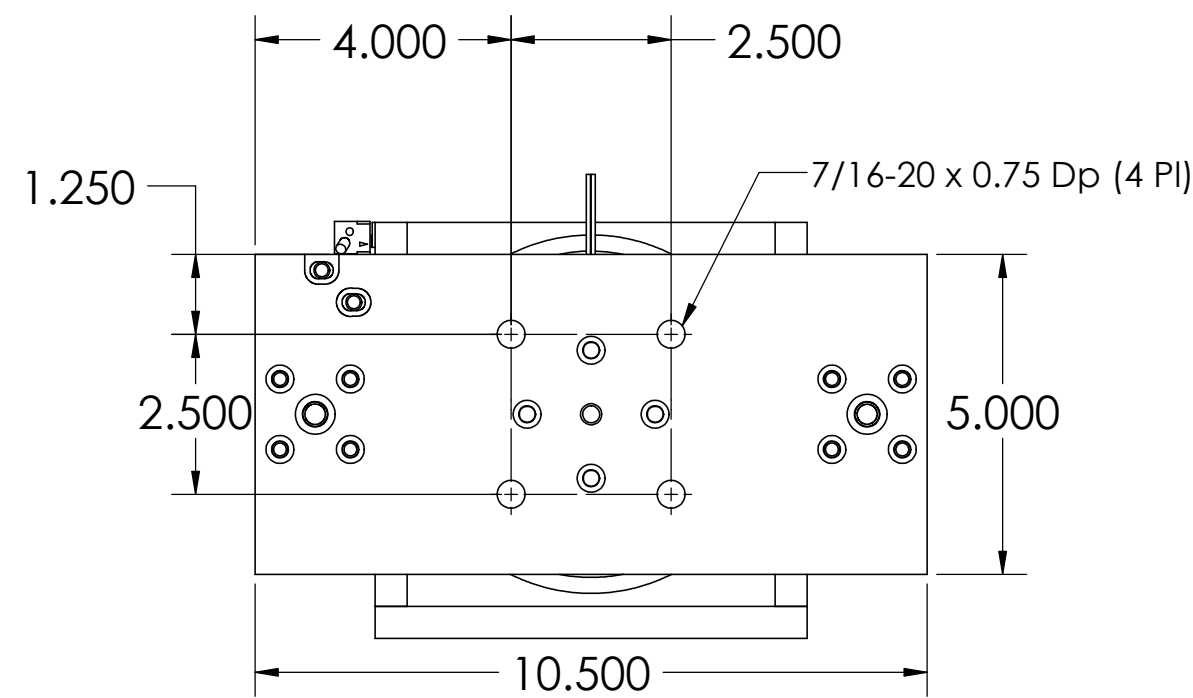
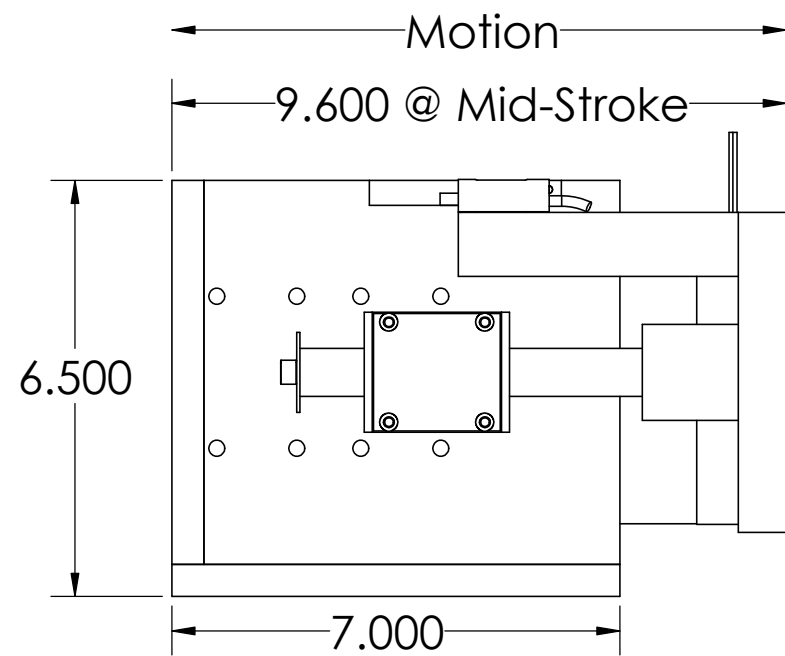


These drawings and specifications are the property of H2W Technologies, Inc. They are issued in confidence and shall not be reproduced, copied, or used without written permission from H2W Technologies, Inc.

REVISION TABLE					
REV	ECN#	DESCRIPTION	REV BY	APPROVED	DATE
---	---	Original Drawing	OOG	MPW	2-1-2019

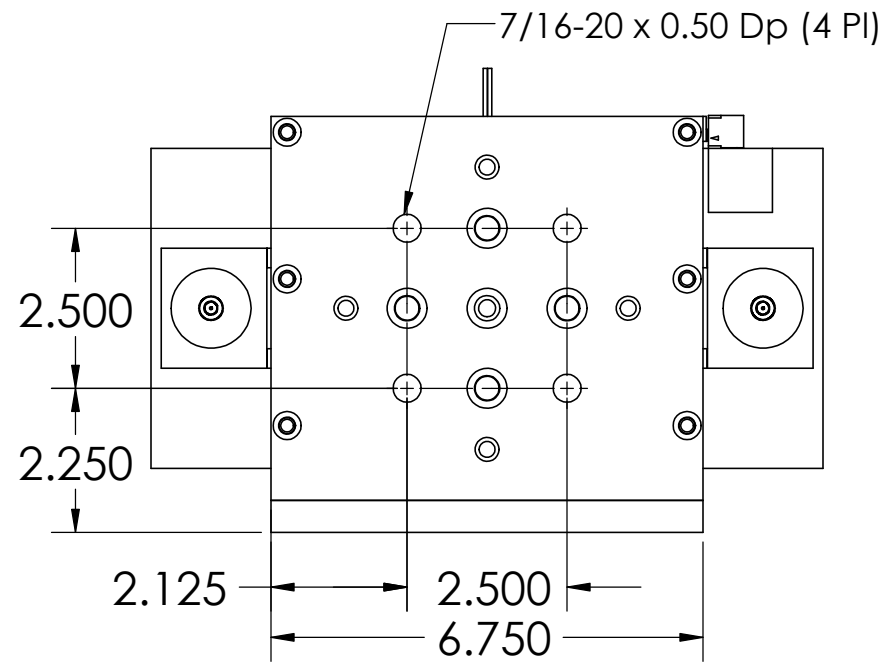

MOTOR SHOWN AT MID-STROKE

UNLESS SPECIFIED OTHERWISE: All dimensions are in inches Standard Tolerances are as follows .XXX ±.005 ANGLES ±1° .XX ±.010 FILLETS AND .X ±.020 CORNERS .010 Remove All Burrs and Sharp Edges		MATERIAL		FINISH		TITLE	
DRAWN	DATE	APPROVED	DATE	DWG #	REV	SHEET	
OOG	2-1-19	MPW	2-1-19	31-0904	---	1 of 2	

H2W Technologies, Inc.
 26380 Ferry Court Santa Clarita, CA 91350 USA
 Tel: (661) 291-1620 Fax: (661) 291-1626
 www.h2wtech.com

Voice Coil Positioning Stage
Model #: VCS12-1000-AB-01-C

These drawings and specifications are the property of H2W Technologies, Inc. They are issued in confidence and shall not be reproduced, copied, or used without written permission from H2W Technologies, Inc.

VOICE COIL POSITIONING STAGE SPECIFICATIONS		
Motor P/N	NCC12-60-1000-2X	
Stroke	1.20"	30.5 mm
Encoder Resolution	1 micron	
Bearing Type	Air Bushing	
Moving Mass	9.8 lbs	4.5 kgrams
Total Mass	54.5 lbs	24.7 kgrams
Resistance @ 20C	3.0 ohms	
Inductance @ 20C	2.7 mH	
Electrical Time Constant	0.90 msec	
Motor Constant	11.8 LBS/SQRT(Watt)	52.5 N/SQRT(Watt)
Force Constant	20.1 LBS/Amp	89.4 N/Amp
Back EMF	2.3 V/ips	89.4 V/m/sec
Continuous Force	100 LBS	454 N
Max Power @ 100% Duty	72 Watts	
Peak Force	300 LBS	1362 N
Max Power @ 10% Duty	646 Watts	

